



A brand of **legrand**

Operating Temp. Range: Discharge : -15 – 50°C (5 120°F); Charge : 0 – 40°C (5 104°F); Storage: -15 - 40°C (5 104°F)

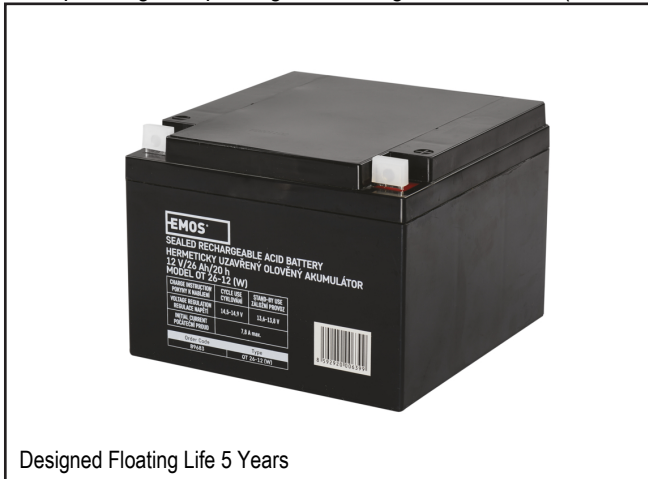

Designed Floating Life 5 Years

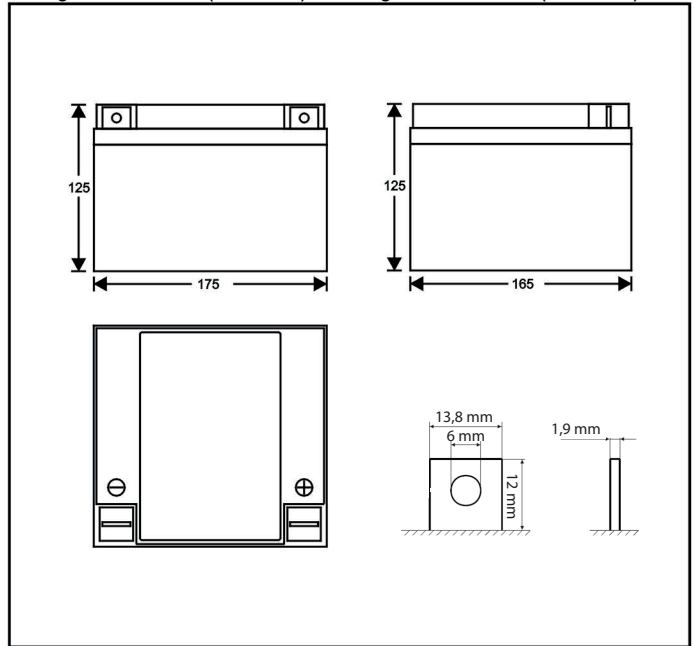

### Specifications


OT26-12(W)		
Nominal Voltage		12V
Rated Capacity (20 hours rate)		26Ah
Dimension (±2mm)	Total Height (with terminals)	125mm
	Length	175mm
	Width	165mm
	Height	125mm
Weight (Approx)		8.05Kg

### Characteristics

Capacity	20 hours rate	(1.3A)	26Ah
Discharge Current Testing (25°C)	20 I <sub>20</sub> rate 1	(26A, 27min)	34min
	60 I <sub>20</sub> rate 3	(78A, 7min)	8min
Internal Resistance	Full Charged Battery 25°C		10mΩ
Capacity Affected By Temperature (20 hours rate)	40°C		102%
	25°C		100%
	0°C		85%
	-15°C		62%
Residual Capacity (25°C)	Capacity After 3 Months Storage		91%
	Capacity After 6 Months Storage		82%
	Capacity After 12 Months Storage		64%
Cycle (Above 300 Time)	Discharge 2hrs at 6.5A Current Charge 6hrs at 2.6A Current (25°C)		
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 7.8A; Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	

★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

### Discharge Current & Duration Time

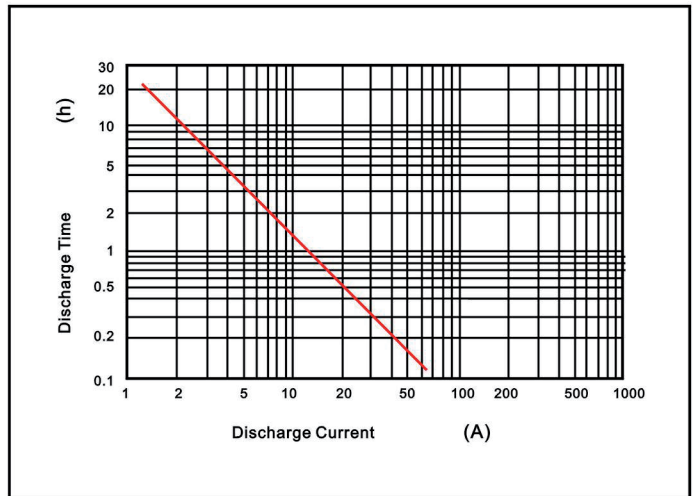

### Discharge Current 25°C

